Don Brown Bus Sales
703 County Hwy 107, Johnstown, NY 12095
(518) 774-7424 • https://www.buscrazy.net

2026 Magellan MFSAB on Chevrolet Express

14 Passengers + Driver

SPEC SHEET

Stock #89808 • VIN 1HA6GUB71RN008255

PRICE

$109,900

As of 2026-11-23

DonBrown BUS SALES, INC.
2026 Magellan MFSAB on Chevrolet Express
14 Passengers + Driver

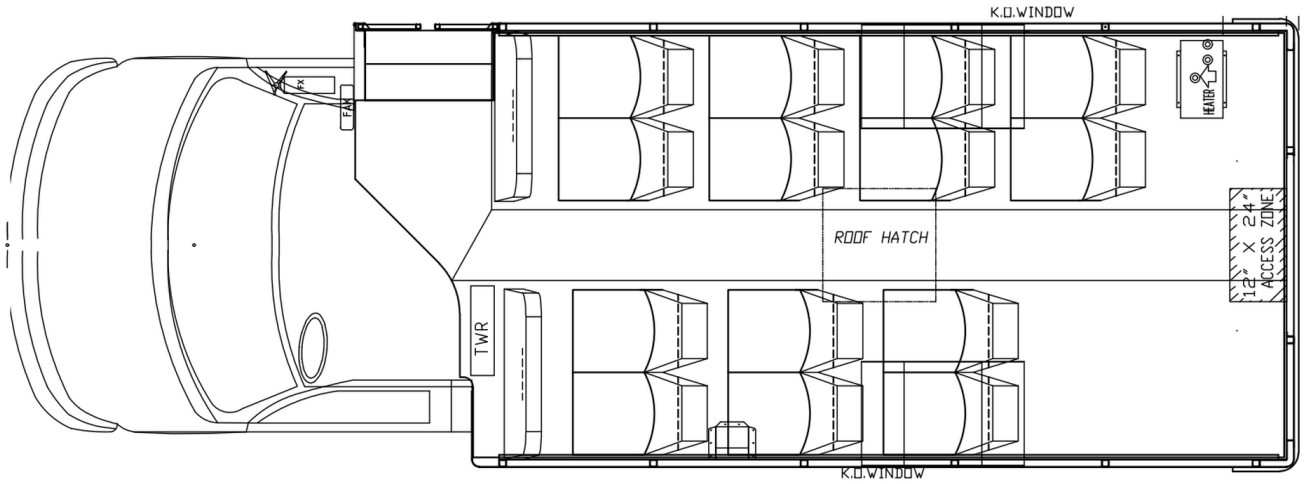

STOCK #89808

BUSCRAZY.NET · (518) 774-7424

Seating layout shown for reference. Specifications subject to change without notice.

Questions or a quote on this unit? Call (518) 774-7424

https://www.buscrazy.net • Real people in Johnstown, NY. Delivered nationwide.

Seating & Restraints

- REQUIRE SEATBELT ON LIFT

Body & Construction

- Core components, DRW high headroom model 5 section. Standard floor (with wheelwells), 76" interior headroom, 25"X78" entrance door, 96" overall width, all-galvanized-steel construction. Body fully insulated.
- Endcaps fiberglass front and rear exterior for use with Magellan school bus warning lights on DH units
- Exterior steel rear corner skins left and right, driprail and below emergency exit rear door for DH units
- Exterior aluminum left and right roof skins for DRW 500 (5section) units
- Exterior steel left and right side skins, behind and above driver skins for DH 500 (5section) units
- Skirts, steel below body panels for std floor DH500
- No Storage/No Battery Box, steel skirt
- Mud Flaps Rear DH
- Flooring gray rubber, 1/8" smooth rubber under seats, 3/16" ribbed center aisle rubber 15" wide.
- Flooring step treads, DRW standard and elevated floor models, gray ribbed tread with integral white ribbed nosing.
- Plywood subfloor for DH/E500 units, 5/8" thick, marine grade
- Cover tops and sides of interior wheel well with black elastomer trim cover, fits dual rear wheel wheelwells
- 14ga galvanized metal skin under plywood subfloor
- Interior panels below window, embossed aluminum, standard floor 500 units.
- Interior Panels Rear Wall DRW with Exit Door, with AC cutout.
- Interior panels upper, smooth aluminum painted white for DRW 500 units.
- Rubrails, floor level side rubrails , 4.6" tall X 16 ga steel.
- Rubrails, seat level side rubrails that wrap around the rear of the bus to the emergency door, 4.6" tall X 16 ga steel.
- Rubrails, window level side rubrails , 4.6" tall X 16 ga steel.
- RUBRAIL NONE AT SKIRT LEVEL
- Rubrails painted black color. (3)
- Window Transition Chevy glass, AS2 tempered clear glass
- Windows Rear Body SL/SH with Rubber Mounted AS3 Tempered 32% Tinted Glass
- Window Rear Door Lower Rubber Mounted AS3 Tempered 32% Tinted Glass
- Window Rear Door Upper Rubber Mounted AS3 Tempered 32% Tinted Glass

Body & Construction (cont.)

- Window Split Sash 36" with AS3 Tempered 26% Tinted Glass, providing an unobstructed 12 x 28 opening when upper sash is lowered. (10)
- Window Split Sash 36" RH and LH Vertical Egress Hinge, Release Handle, Buzzer, Interior/Exterior Signage, and Yellow Exterior Reflective Tape.
- Undercoat body components, chassis components such as driveline, brake lines, wiring, exhaust system are not undercoated NJ Spec.
- Exhaust pipe to be flush with bumper or side (+0.25"/-0.00"), otherwise exhaust pipe extends 1" to 1.5" from bumper or body
- Install OEM hub caps at factory, Chevy and Transit units only, hub caps will NOT be included if not selected.

Chassis

- 2024 Chevrolet G4500 — 159" wheelbase, 6.6L gas engine, 14,200 lb GVWR

Climate & Ventilation

- A/C 70K ACT dual compressor, 2 fan, CS-2 skirt mount condenser, dash & EV20 in-wall evaporators, Chevy gas.
- Heater 60K floor mount for Chevy units placed IN RIGHT HAND REAR CORNER OF BUS, includes 2 shutoff valves, BLEEDER VALVE
- Heater shut off valve, cable operated with cable operator located on the dash, use on GM units only to relocate handle from under hood to dash.
- Roof Hatch Transpec Low Profile Standard Safety Vent II Model 1975, 1" White Tape on Ext. Perimeter, Activate Buzzer when Opened w/ Ignition on, Emergency Exit Decals, Operating Instructions, Interior & Exterior Handles, Not Approved for Canada

Electrical

- Battery tie-in for 2021+ Chevy gas units with no battery box. Locate additional battery on RH side frame rail. Customer will need to order an additional battery 220-11-12 to locate on RH side frame rail. The OEM battery stays under the hood on a gas chas
- Delete 2nd Battery from Frame Rail
- Core electrical items for all Chevy buses with higher option content including Elect. Board, switch panel, buzzer, domes, step lights, and main harness
- Light, red over rear emergency door on the interior of bus that is illuminated when the headlights are turned on.

Electrical (cont.)

- Backup-alarm 112dBA that is activated upon placing the bus in reverse gear, wired through the ignition.
- Radio, OEM supplied, 4 speakers. Provides tie-in harness to main chassis.

Chassis & Running Gear

- Bumper 10" x 3/16 galvanneal steel channel DRW, wrap around extending forward at least 12" w/protecting end caps, with relief hole for exhaust pipe to pass thru.
- Bumper Brace to attach to frame side, DH 400/500 and DE/DH 416 models, all Gas and Diesel exhaust systems.
- Fuel system protection and preperation for Chevy gas chassis standard floor 139"WB
- PARTS REQUIRED TO BUILD SPECIFIC BODY MODEL ON SPECIFIC CHASSIS BRAND (CHEVY STD 500)
- Chevy 500 exhaust thru/under the rear bumper gasoline
- Entrance step drivers side, Chevy, black powder coated steel diamond tread, includes flat mud flap on passenger side.

Doors & Entry

- Door, entrance, black aluminum frame with full-length tempered AS2 glass for SH/DH units
- Door entrance control, manual with positive over-center locking handle in both open and closed positions, for glass doors.
- Rear egress door, RH (curbside) hinge, aluminum construction, select glass rear door upper/lower separately.
- Rear door hinge continuous stainless steel
- Rear Door Latch three point latch, one at top, center and bottom of door. Red interior handle and web style non-hitching exterior handle.

Safety Equipment

- Child alert system with dome lights; armed by warning lights or door; after ignition off, an audible alert signals driver to check bus; horn will sound after 8 seconds if not disarmed or ignition not in on position; to disarm, ignition on and push button
- Backup camera safety system with 7" Monitor in the rearview mirror. Rosco
- Warning lights, four red & four amber halogen 7"
- Warning light system, 8 light, non-sequential, wired through ignition, Master switch, Warning Start switch.
- Triangle warning reflectors (set of three).
- Fire extinguisher, 2-1/2 lb., 1A 10 BC. (steel head), may only be mounted near entrance door.
- Seat belt cutter, loaded loose in driver compartment.

Safety Equipment (cont.)

- Body fluids kit for AL, AR, CO, CT, KS, MA, MN, MO, ND, PA, SD, TX, WI, WY, WV
- First aid kit 10 Unit for New York, 22+ passengers
- Stop Arm 2 Lights High Int LED Strobe T6100-101-E21 - PLASTIC

Interior

- Grabrail 42" long 1 1/4 dia. stainless, mounted left of entry on RH barrier, designed to prevent entanglement (Passes NHSTA string and nut test)
- Mirror interior clear view back bonded glass, rounded corners and protected edges, 6 x 30 flat. Installed above drivers head on front bulkhead. Interior mirror providing the driver a clear view of interior and rear exit door.
- Window Split Sash Opening 5" Limit With Stop Placed in Track
- Vandal lock for Chevy, permits manual lock of rear emergency door from inside while bus not in use, with buzzer and visual indicator on panel. Engine will not start until lock is disengaged, warning buzzer will activate to alert driver lock is engaged.
- Headknockers to comply with FMVSS 222; foam pads covered with gray fire block upholstery.
- Pad over driver door covered with gray fire block upholstery.

Lighting

- Brake/tail lights LED with separate license plate light, (2) 4" flush mount
- brake/tail lights, 2- 7" LED type
- Clearance lights LED type; row of three red lights on rear of bus and single reds on left & right rear, row of three amber lights on front of bus with single ambers on left and right front sides. Lights are low profile grommet mount.
- Four domelights are powered through the battery, function when dome light switch is on.
- Drivers dome light tied to OEM drivers door open circuit, comes on when drivers door is open, will time itself out when door is shut.
- Lamps, turn signal amber LED rear 7"
- Lamps, backup white (2) 4" flush mount LED
- Lights, stepwell lights are illuminated by a DOD operated switch so as to light only when the headlights and clearance lights are on and the DOD is open.
- Light, center brake light, located at rear exterior endcap above rear door, works in conjunction with the brake lights. (NJ Spec)
- LED lights for endcap sign, turned on-off by switch, lettering not included. Use with 770-02-12 reflective sign.

Lighting (cont.)

- Lights, turn signal, amber LED 2" below side bodyrail and behind entrance doors. Mount with armor. Magellan only.

Exterior Mirrors

- Remote Heated Rearview and Crossview mirror system w/ black bracketry for GM DRW buses. ROSCO AccuStyle 8"x15" dual Rearview mirror incl. 7"x9.5" flat and 7"x4" convex mirror glass, with Heated EyeMax LP Crossview mirrors.

Paint & Signage

- Paint body exterior yellow, Chevy DH/DE buses.
- Paint window bars yellow
- Paint scheme with black borders around warning lights extending approximately 3 inches inboard of warning lights to vertical inner border. Endcap areas around black gelcoat regions are painted body color including center portion of front and rear caps.
- Tape, reflective two inch yellow, outline sides/rear of DH/DE units
- Endcap signage "SCHOOL BUS" decals 8" high black letters with 1" stroke on yellow reflective background, includes front and rear.
- Signage, identification, "Magellan"
- Decal "PASS CAPACITY" 2in black, front bulkhead
- Additional information added to Certification Label "Approved Seat Plan Number", NY spec.
- Exterior decal 2" tall "EMERGENCY EXIT" in black/arrow in black. Interior decal 2" tall "EMERGENCY EXIT" in black/arrow red. (CA Spec)

Seating & Barriers

- Barrier, 37" left hand high back with medium gray fire block upholstery, leg at 27" position, for 36" & 39" seat. IMMI
- Barrier spacing LH to B-pillar, spacing provides energy absorption zone for 3 passengers per FMVSS222, must be selected when LH front seat accommodates 3 passengers.
- Barrier, 37" right hand high back with medium gray fire block upholstery, no welting, leg at 27" position, for 36" & 39" seat. IMMI
- Barrier spacing RH to stepwell, none.
- Seat, 39" left hand, IMMI SABRE three passenger with lap belts, with medium gray fireblock vinyl upholstery, no welting. Orange, gray, and red belts. Leg at 27" position. (5)
- Seat spacing LH 26in hip/knee. (5)

Seating & Barriers (cont.)

- Seat, 39" right hand, IMMI SABRE three passenger with lap belts, with medium gray fireblock vinyl upholstery, no welting. Orange, gray, and red belts. Leg at 27" position. (5)
- Seat spacing RH 26in hip/knee. (3)
- Seat spacing RH 25in hip/knee. (2)
- Seat mounting hardware floor mount seats, required for each non-track-mount seat (10)
- Reupholster Chevy drivers seat with gray fire block vinyl upholstery, including left arm rest.

Warranty

- Warranty, standard limited body, covers body shell, structure, seat structure for 5 YR/100K MI, manufacturer's components for 2 YR/24K MI, other components 1 YR/12K MI. Excludes corrosion due to road chemicals. See warranty policy for full details.

PRICING BREAKDOWN

Purchase Price	$109,725.00
Document Fee	$175.00
TOTAL PRICE	**$109,900.00**

EST. NO MONEY DOWN LEASE & LOAN PAYMENTS

	LEASE / mo	LOAN / mo
5 YEAR / 60 MONTHS	$1,732.64	$2,246.21
4 YEAR / 48 MONTHS	$1,743.35	$2,710.40
3 YEAR / 36 MONTHS	$1,866.97	$3,486.94

Monthly payments are estimates based on approved credit — call for financing terms. Tax, title and tags not included in total.

Price does not include sales tax, registration, title, or licensing fees, or any other taxes, fees, or charges required by state or federal law. All such taxes and fees are determined at time of sale and are the responsibility of the purchaser.

Price and availability subject to change. Call to confirm before purchase.