Don Brown Bus Sales
703 County Hwy 107, Johnstown, NY 12095
(518) 774-7424 • https://www.buscrazy.net

2028 Magellan Type A school bus on Transit

5 Passengers + 1 Wheelchair + Driver

SPEC SHEET

Stock #97490 • VIN 1FDDR5P89VKA07701

PRICE

$116,200

As of 2026-11-23

DonBrown BUS SALES, INC.

2028 Magellan Type A school bus on Transit on Ford Transit

5 Passengers + 1 Wheelchair + Driver

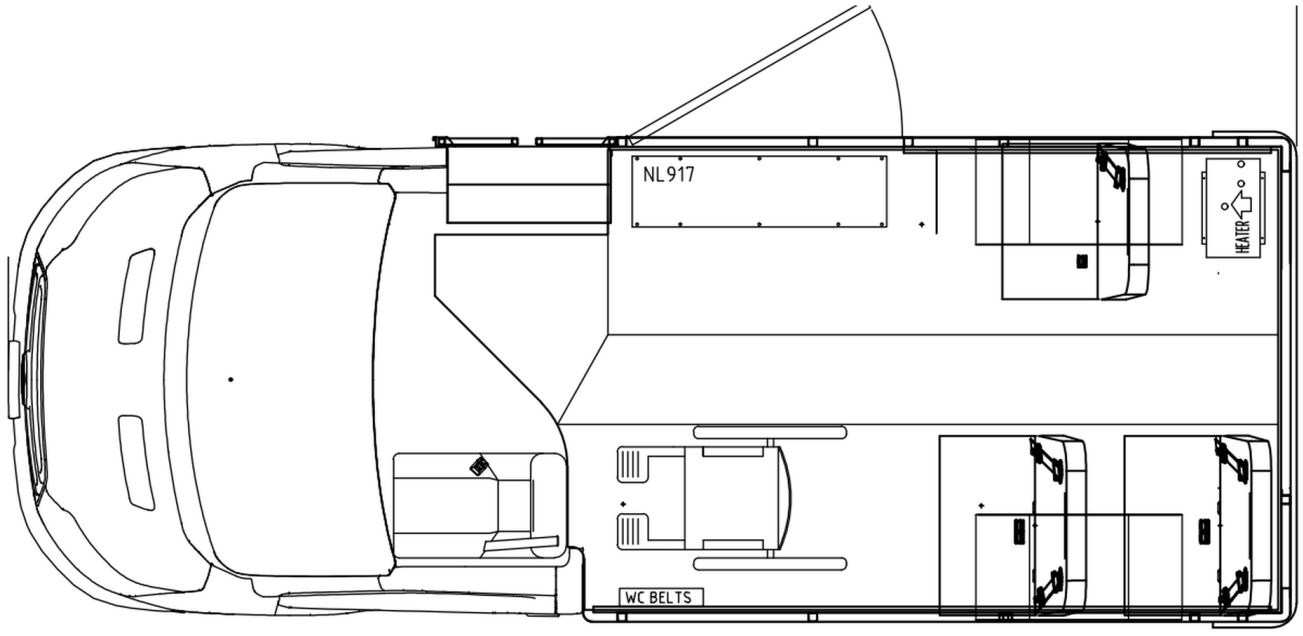

STOCK #97490

BUSCRAZY.NET · (518) 774-7424

Seating layout shown for reference. Specifications subject to change without notice.

Questions or a quote on this unit? Call (518) 774-7424

https://www.buscrazy.net • Real people in Johnstown, NY. Delivered nationwide.

Body & Construction

- Core components, SRW low headroom model 3 section +8" wheel chair front. Standard floor (with wheelwells), 68" interior headroom, 25"X70" entrance door, 83" overall width, all-galvanized-steel construction. Body fully insulated. Transit
- Endcaps fiberglass front and rear exterior for use without warning lights on TL commercial/MFSAB units
- Exterior steel rear corner skins left and right, driprail and below emergency exit rear door for TL and TH units
- Exterior aluminum left and right roof skins for SRW 308 (3section+8) units
- Exterior steel left and right side skins, behind and above driver skins for TL 308 units with lift
- Skirts, steel below body panels for Ford Transit TL308
- Right-hand Front Steel skirt, without storage box, for Transit TL and TH 400 bus models.
- Mud Flaps Rear XL/XH
- Flooring black rubber, 1/8" smooth rubber under seats, 3/16" ribbed center aisle rubber 15" wide.
- Flooring step treads, SRW LoTop and HiTop models, black ribbed tread with integral white ribbed nosing.
- Plywood subfloor for TL/H400 units, 1/2" thick, marine grade
- Interior panels below window, embossed aluminum, Transit TL/TH 400 units.
- Interior Panels Rear Wall SRW or Transit Low-Top with Exit Door, with AC cutout.
- Interior panels upper, perforated noise suppression ceiling, aluminum, painted white for SRW 308 units.
- RUBRAIL NONE AT FLOOR LEVEL
- RUBRAIL NONE AT SEAT LEVEL
- RUBRAIL NONE AT WINDOW LEVEL
- RUBRAIL NONE AT SKIRT LEVEL
- Rubrails painted none
- Window Transition Ford Transit glass, AS2 tempered clear glass
- Window located in upper portion of lift door with AS3 32% tinted tempered glass, rubber mounted.
- Windows Rear Body SL/SH with Rubber Mounted AS3 Tempered 32% Tinted Glass
- Window Rear Door Lower Rubber Mounted AS3 Tempered 32% Tinted Glass
- Window Rear Door Upper Rubber Mounted AS3 Tempered 32% Tinted Glass
- Window Split Sash 28" with AS3 Tempered 26% Tinted Glass, providing an unobstructed 12 x 28 opening when upper sash is lowered. (4)

Body & Construction (cont.)

- Undercoat body components, chassis components such as driveline, brake lines, wiring, exhaust system are not undercoated NJ Spec.
- Exhaust pipe to be flush with bumper or side (+0.25"/-0.00"), otherwise exhaust pipe extends 1" to 1.5" from bumper or body

Chassis

- 2027 Ford — 138" wheelbase, 3.5L gas engine, 9,070 lb GVWR

Chassis & Running Gear

- Chassis (Required, Quantity Must = 1)
- Bumper 8" x 3/16 galvanneal steel channel SRW, wrap around extending forward 12", for use with exhaust pipe routed under the bumper or to the side.
- Bumper Brace to attach to frame side, Ford Transit 308models.
- Fuel system protection and preperation for Ford Transit. Gas
- PARTS REQUIRED TO BUILD SPECIFIC BODY MODEL ON SPECIFIC CHASSIS BRAND (TRANSIT STD 308)
- Fuel sending unit access cover, black diamond tread plate recessed into rubber floor to provide inspection access to fuel sending unit.
- * EXHST TRANS 400 THRU/UNDR GAS
- Entrance step drives side, Ford, bright aluminum diamond tread, includes flat mud flap on passenger side.
- Spare Tire/Wheel FORD Transit SRW

Climate & Ventilation

- A/C 30K ACT, Chassis radiator mount condenser, dash evaporator, rear EV20 inwall ACT evaporator for Transit gas.
- Heater 60K floor mount for Ford units placed IN RIGHT HAND REAR CORNER OF BUS, for gas engines, includes 2 shutoff valves, BLEEDER VALVE
- Auxiliary fan two-speed, right side over windshield.
- Roof vent, static with non-closeable control grille.

Electrical

- Battery tie-in for Ford Transit gas units with no battery box.
- Red light over rear emergency door on the interior of bus that is illuminated when the ignition is turned on.
- Backup-alarm 112dBA that is activated upon placing the bus in reverse gear, wired through the ignition.
- Circuit breakers provided instead of fuses. Breakers are manual-reset.
- Radio, OEM supplied, 4 speakers. Provides tie-in harness to main chassis.

Electrical (cont.)

- Core electrical items for all Ford Transit buses with higher option content including Elect. Board, switch panel, buzzer, domes, step lights, and main harness. For chassis year 2020+.

Doors & Entry

- Door, entrance, black aluminum frame with full-length tempered AS2 glass for SL units
- Door entrance control, electric mechanism above door header, for glass doors, driver control panel mounted in doghouse. No manual cable-release.
- Rear egress door, RH (curbside) hinge, aluminum construction, select glass rear door upper/lower separately.
- Rear door hinge continuous stainless steel
- Rear Door Latch three point latch, one at top, center and bottom of door. Red interior handle and web style non-hitching exterior handle.

Wheelchair & Paratransit

- * DOOR W/C SINGLE LEAF 44X57
- Wheelchair lift, Braun Century NCL1000IB3351HB-2, meets ADA and FMVSS 403/404 requirements, spring loaded rollstop, economical lightweight design, parallel arm,gravity down, WITH restraining belt. 1000# Lift.
- Model Year 2020-2025 Transit Interlock supplies power to lift when transmission is in park, emergency brake applied, and lift door is open. Shift lever is locked when power is supplied to lift. Lift operates when ignition is ON or OFF. Includes status d
- Floor securement station, includes 4 L- style Oval pockets.
- Wheelchair location "L2" LH second row from rear, designates location only and includes no anchors or belts.
- Wheelchair securement Q'Straint belt kit & bag with deluxe retractors for L-track.
- Light located on exterior under lift door, comes on when lift door is opened.
- Floodlight on lift door
- Light, red, for lift door, dash mounted, when lift door is ajar, non-flashing

Safety Equipment

- Child alert system. None.
- Backup camera Transit only safety system with 7" monitor mounted above window. Rosco
- Warning lamps, none
- Electrical control panel for buses with no 4 or 8 light system.
- Triangle warning reflectors (set of three).
- Wheel chocks 7" X 8" X 10.25" non-skid rubber.
- Fire extinguisher, 5 lb., 3A 40BC with 10" hose and nozzle,, may only be mounted near entrance door.
- Seat belt cutter, loaded loose in driver compartment.
- Body fluids kit in metal case for AL, AR, CO, CT, KS, MA, MN, MO, ND, PA, SD, UT, WI, WY, WV
- First aid kit 24 Unit for AK, AL, AR, AZ, CT, DE, FL, GA, IA, ID, IL, IN, KS, KY, LA, MA, ME, MI, MN, MO, MS, MT, NC, ND, NE, NH, NJ, NM, NV, ,OH, OK, PA, RI, SC, SD, TN, TX, UT, VT, WA, WV, WY
- No Stop Arm

Interior

- Grabrail 42" long 1 1/4 dia. stainless, mounted left of entry on RH barrier, designed to prevent entanglement (Passes NHSTA string and nut test)
- Mirror interior clear view back bonded glass, rounded corners and protected edges, 6 x 16 flat. Installed above drivers head on front bulkhead to fit Ford Transit chassis. Interior mirror providing the driver a clear view of interior and rear exit door.
- Vandal lock for Ford Transit, permits manual lock of rear emergency door from inside while bus not in use, with buzzer and visual indicator on panel. Engine will not start until lock is disengaged, warning buzzer will activate to alert driver lock is enga
- Headknockers to comply with FMVSS 222; foam pads covered with gray fire block upholstery.
- Pad over driver door covered with gray fire block upholstery.

Lighting

- Brake/tail lights LED with separate license plate light, (2) 4" flush mount
- brake/tail lights, 2- 7" LED type
- Clearance lights LED type; row of three red lights on rear of bus and single reds on left & right rear, row of three amber lights on front of bus with single ambers on left and right front sides. Lights are low profile grommet mount.
- Four domelights are powered through the ignition, will only function when ignition is turned on and dome light switch is on.
- Drivers dome light operated by separate switch on console and driver door. Transit does not have an OEM dash switch.
- Lamps, turn signal amber LED rear 7"
- Lamps, backup white (2) 4" flush mount LED
- Lights, stepwell lights are wired ignition hot and are illuminated whenever the DOD is opened.
- Black Housing ADA Light, exterior located near lower edge of DOD. Comes on when DOD opens, or stepwell lights are on.
- Dimmer switch for electrical control box lighted switches.

Exterior Mirrors

- Remote Heated Rearview mirror system w/ black bracketry for Ford Transit buses. ROSCO AccuStyle 8"x15" dual Rearview mirror incl. 7"x9.5" flat and 7"x4" convex mirror glass. (No Crossview mirrors)

Paint & Signage

- Paint body exterior white, Ford TL/TH/COMM buses.
- Paint Wheels Black (Outer only, does not include inner duals or spare.)
- Tape, reflective two inch white, outline sides/rear of SL/SH units
- Signage, identification, "Magellan"
- Warning Label displaying vehicle height of 9'9", interior mounted within view of the driver. Includes height of strobe or open vent.
- Exterior decal 2" tall "EMERGENCY DOOR" in black/arrow in black. Interior decal 2" tall "EMERGENCY DOOR" in black/arrow red. (WA Spec)

Seating & Barriers

- Barrier, 37" left hand high back with medium gray fire block upholstery, leg at 20.5" position, for 36" & 39" seat. IMMI
- Barrier spacing LH to B-pillar, none.
- Stanchion pole with bar right hand, includes modesty panel & LH entry grab rail, for low top buses, 16" wide
- Stanchion pole with bar right hand, Low Top, includes black modesty panel and upper clear panel, 16" wide for placement behind wheelchair lift.
- Barrier spacing RH to stepwell, none.
- * SEAT LH IM 36S 3PT 2ICS GRY FB (2)
- Seat spacing LH 28in hip/knee, maximum allowable to meet FMVSS 222 (school bus certification). (2)
- Seat, 26" right hand, IMMI SABRE one passenger with 3 point belts, with medium gray fireblock upholstery, no welting. Leg at 20.5" position.
- Seat spacing RH 28in hip/knee, maximum allowable to meet FMVSS 222 (school bus certification).
- Seat mounting hardware floor mount seats, required for each non-track-mount seat (3)
- Track Above Window Left Hand Side of 3-Row Busses for Wall Side Shoulder Belts, Required Non-School Busses 10,000# or less

Warranty

- Warranty, standard limited body, covers body shell, structure, seat structure for 5 YR/100K MI, manufacturer's components for 2 YR/24K MI, other components 1 YR/12K MI. Excludes corrosion due to road chemicals. See warranty policy for full details.

PRICING BREAKDOWN

Purchase Price	$116,025.00
Document Fee	$175.00
TOTAL PRICE	**$116,200.00**

EST. NO MONEY DOWN LEASE & LOAN PAYMENTS

	LEASE / mo	LOAN / mo
5 YEAR / 60 MONTHS	$1,831.96	$2,374.98
4 YEAR / 48 MONTHS	$1,843.29	$2,865.78
3 YEAR / 36 MONTHS	$1,974.00	$3,686.83

Monthly payments are estimates based on approved credit — call for financing terms. Tax, title and tags not included in total.

Price does not include sales tax, registration, title, or licensing fees, or any other taxes, fees, or charges required by state or federal law. All such taxes and fees are determined at time of sale and are the responsibility of the purchaser.

Price and availability subject to change. Call to confirm before purchase.